


type: LAS

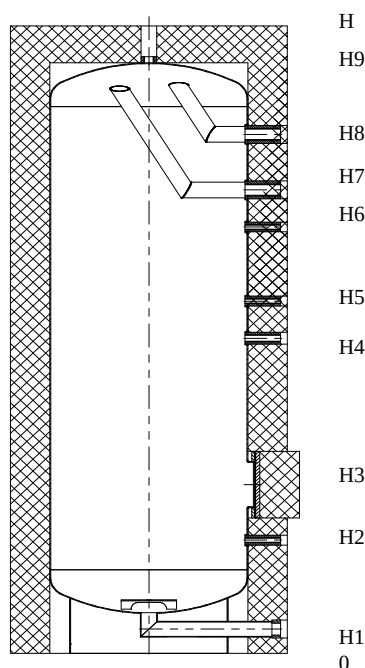

- Hot water storage tank exclusively stainless steel, material 1.4571 / 1.4404 pickled and neutralized.
- All Rp-connections are inside thread according to EN 10226.
- The 100 mm-thick flexible foam insulation ensures economical operation by minimizing heat loss. (the insulation casing of the tanks can easily be unmounted and re-mounted, in silver colour and specifically to fit the parameters of the tanks.)
- Reserves the right to make changes without notice!

Measurements from 150 to 750 litre


dimensions in mm

capacity (l)	150	200	300	400	500	500/ D650	600	650	750
H1	65	65	65	65	65	65	65	80	80
H2	310	305	305	350	350	365	385	400	400
H3	380	455	455	505	505	520	540	550	550
H4	590	600	850	870	1120	885	1155	915	1165
H5	570	700	950	970	1220	985	1255	1015	1265
H6	730	900	1150	1170	1420	1185	1455	1215	1465
H7	680	1000	1250	1270	1520	1285	1555	1315	1565
H8	780	1150	1400	1420	1670	1435	1705	1465	1715
H9	992	1362	1612	1657	1907	1674	1943	1739	1989
H	1075	1445	1695	1740	1990	1757	2026	1823	2073
D1 Ø-tank	500	500	500	600	600	650	650	750	750
D2 Ø-soft foam	700	700	700	800	800	850	850	950	950
wheight (kg)	30	37	51	60	68	74	76	92	108

connections

capacity (l)	150	200	300	400	500	500/ D650	600	650	750
H3	120/180	120/180	120/180	120/180	120/180	120/180	120/180	120/180	120/180
H1, H8	Rp 1 ¼"	Rp 1 ¼"	Rp 1 ¼"	Rp 1 ½"	Rp 1 ½"	Rp 1 ½"	Rp 1 ½"	Rp 2"	Rp 2"
H7	Rp 1 ¼"	Rp 1 ¼"	Rp 1 ¼"	Rp 1 ½"	Rp 1 ½"	Rp 1 ½"	Rp 1 ½"	Rp 2"	Rp 2"
H4	Rp ¾"	Rp ¾"	Rp ¾"	Rp ¾"	Rp ¾"	Rp ¾"	Rp ¾"	Rp ¾"	Rp ¾"
H2	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"
H5, H6	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"
H9	Rp 1"	Rp 1"	Rp 1"	Rp 1"	Rp 1"	Rp 1"	Rp 1"	Rp 1"	Rp 1"

type: LAS

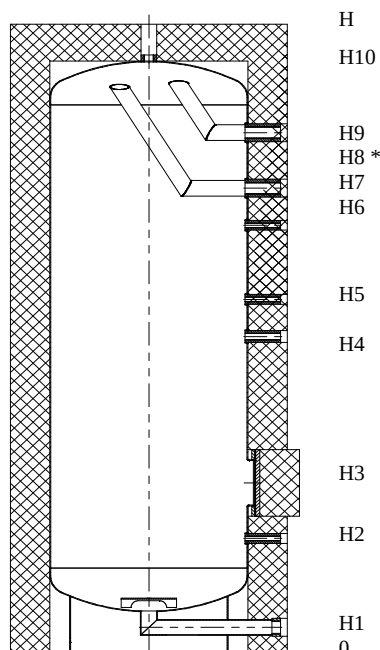

- Hot water storage tank exclusively stainless steel, material 1.4571 / 1.4404 pickled and neutralized.
- All Rp-connections are inside thread according to EN 10226.
- The 100 mm-thick flexible foam insulation ensures economical operation by minimizing heat loss. (the insulation casing of the tanks can easily be unmounted and re-mounted, in silver colour and specifically to fit the parameters of the tanks.)
- Reserves the right to make changes without notice!

Measurements from 1000 to 5000 litre

dimensions in mm

capacity (l)	1000	1000/ D850	1250	1500	2000	2500	3000	4000	5000
H1	80	80	70	70	100	100	110	115	115
H2	430	430	445	445	510	540	550	600	600
H3	580	580	545	545	710	840	900	950	950
H4	950	1200	965	1215	1360	1140	1600	1500	2000
H5	1050	1300	1065	1315	1460	1240	1700	1700	2200
H6	1250	1500	1265	1515	1660	1440	1900	2100	2600
H7	1350	1600	1365	1615	1810	1585	2050	2300	2800
* H8	-	-	1395	1645	1760	-	-	-	-
H9	1500	1750	1515	1765	2060	1840	2300	2600	3100
H10	1790	2037	1831	2081	2425	2231	2741	3080	3580
H	1874	2121	1914	2164	2505	2316	2826	3165	3665
D1 Ø-tank	900	850	1000	1000	1100	1300	1300	1400	1400
D2 Ø-soft foam	1100	1050	1200	1200	1300	1500	1500	1600	1600
weight (kg)	122	130	162	205	300	335	430	570	605

connections

capacity (l)	1000	1000/ D850	1250	1500	2000	2500	3000	4000	5000
H3, H8*	120/180	120/180	120/180	120/180	120/180	400/480	400/480	400/480	400/480
H1, H9	Rp 2"	Rp 2"	Rp 2"	Rp 2"	DN65	DN65	DN65	DN65	DN65
H7	Rp 2"	Rp 2"	Rp 2"	Rp 2"	DN65	DN65	DN65	DN65	DN65
H4	Rp 3/4"	Rp 3/4"	Rp 3/4"	Rp 3/4"	Rp 3/4"	Rp 3/4"	Rp 3/4"	Rp 3/4"	Rp 3/4"
H2	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"
H5, H6	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"
H10	Rp 1"	Rp 1"	Rp 1"	Rp 1"	Rp 1"	Rp 1"	Rp 1"	Rp 1"	Rp 1"

* From 1250 to 2000 litre tanks have two inspection flanges (120/180 mm).

2. page