


type: MUT-R1

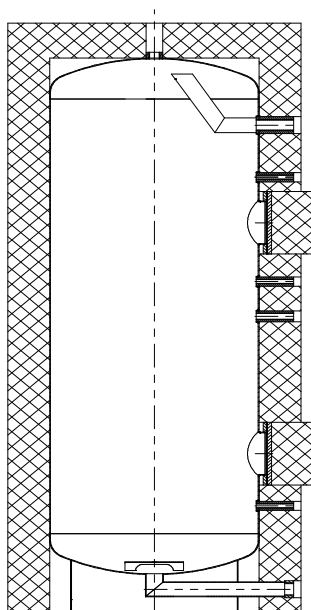

H
H9

H8

H7

H6

H5

H4

H3

H2

H1
0

- Hot water storage tank exclusively stainless steel, material 1.4571 / 1.4404 pickled and neutralized.
- All Rp-connections are inside thread according to EN 10226.
- The 100 mm-thick flexible foam insulation ensures economical operation by minimizing heat loss. (The insulation casing of the tanks can easily be unmounted and re-mounted, in silver colour and specifically to fit the parameters of the tanks.)
- Reserves the right to make changes without notice!

Measurements from 200 to 5000 litre

dimensions in mm

capacity (l)	150	200	300	500	750	1000	1500	2000	3000	5000	5000
H1	65	65	65	65	80	80	80	100	115	115	115
H2	285	305	305	350	400	430	445	510	550	600	600
H3	435	455	455	505	550	580	600	710	900	1000	950
H4	625	645	850	1000	1050	950	1100	1360	1600	2000	1510
H5	725	745	950	1100	1150	1050	1200	1460	1700	2100	1610
H6	-	-	-	-	-	-	-	1660	-	-	-
H7	980	1000	1250	1520	1565	1350	1595	1810	2050	2800	2110
H8	1130	1150	1400	1670	1715	1500	1745	2060	2300	3100	2410
H9	1320	1362	1612	1907	1990	1790	2080	2422	2745	3582	2858
H	1402	1445	1695	1990	2075	1874	2165	2505	2826	3665	2945
D1 ø-tank	400	500	500	600	750	900	1000	1100	1300	1400	1600
D2 ø-soft foam	600	700	700	800	950	1100	1200	1300	1500	1600	1800
weight (kg)	30	36	41	55	94	118	160	199	372	591	661

connections

capacity (l)	150	200	300	500	750	1000	1500	2000	3000	5000	5000
H3	120/180	120/180	120/180	120/180	120/180	120/180	120/180	120/180	400/480	400/480	400/480
H6	-	-	-	-	-	-	-	120/180	-	-	-
H1, H8	Rp 1 ¼"	Rp 1 ¼"	Rp 1 ¼"	Rp 1 ¼"	Rp 1 ½"	Rp 1 ½"	Rp 2"	Rp 2"	Rp 2 ½"	Rp 2 ½"	Rp 2 ½"
H2, H5, H7	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"	Rp 1/2"
H4	Rp 3/4"	Rp 3/4"	Rp 3/4"	Rp 3/4"	Rp 1"	Rp 1"	Rp 1 ½"	Rp 1 ½"	Rp 1 ½"	Rp 1 ½"	Rp 1 ½"
H9	Rp 1"	Rp 1"	Rp 1"	Rp 1"	Rp 1"	Rp 1"	Rp 1"	Rp 1"	Rp 1"	Rp 1"	Rp 1"